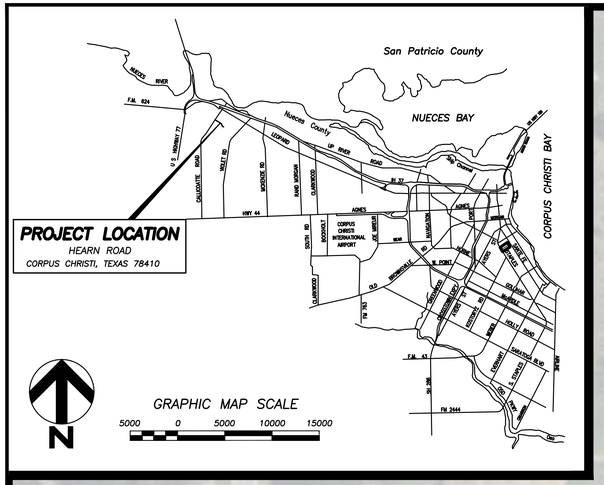

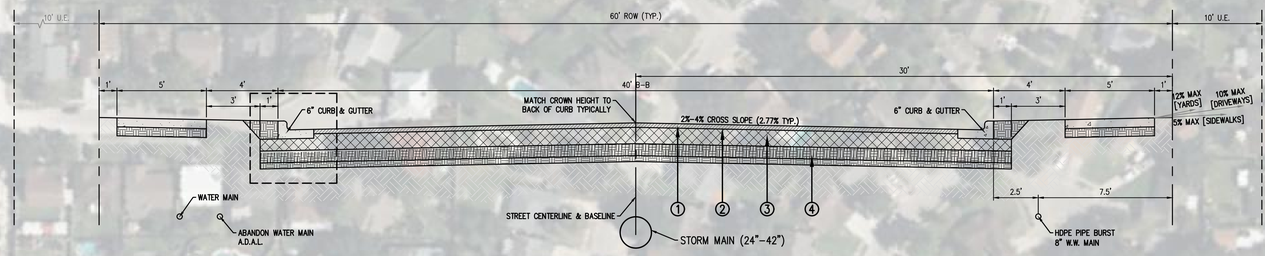

PROPOSED STREET SECTION - STA 10+00



1. 3" TY 'D' HMAC [ONE-LIFT]
2. UNDER SEAL (PER TXDOT ITEM 316)
3. 11" FLEX BASE MATERIAL TY A GR 1-2 [8" MAX LOOSE LIFTS] [COMPACTED TO 98% MODIFIED PROCTOR AT OR WITHIN 2% OF OPTIMUM MOISTURE]
4. 8" LIME STABILIZED SUBGRADE (8% LIME BY WEIGHT) IN 12" SUBGRADE COMPACTED TO 95% STD PROCTOR TEST (ASTM D698) AT OR WITHIN 3% ABOVE OPTIMUM MOISTURE CONTENT.

LEGEND:

- PAVEMENT
- SIDEWALK
- DRIVEWAY
- ADA RAMP

2020 bond
www.cctexas.com

HEARN ROAD
(CALLICOATTE ROAD TO DEAD END)
STREET & INFRASTRUCTURE IMPROVEMENTS

PROJECT # STR-1011

URBAN ENGINEERING
TBPE FIRM NO. 145, TBPLS FIRM NO. 10032400
2725 SWANTNER DR, CORPUS CHRISTI, TX 78404
PHONE: 361.854.3101 WWW.URBANENG.COM
© 2022 by Urban Engineering

S:\Projects\43500s\p\43499\C100\DWG\Exhibits\Exhibit1.dwg modified by chicen on Jul 14, 2022 - 11:48am